

Multi-View HUB Dome Camera

■ Precautions

- When installing (attaching) this unit, remove any debris from the ceiling before installing the elevator.
 - If not removed, elevator noise may be generated.
- Check the front of the camera before installing it.

■ Warranty



To receive after-Sale Service, have the following ready when you contact our branches

1. Name of the product
2. Modul number of the product
3. The area of problem
4. Phone number and address at which you can be contacted.

■ Warranty Card

PRODUCT	
MODEL	
DATE PURCHASED	
WARRANTY PERIOD	
AGENCY ADDRESS	

■ Warranties the original purchaser of this product as follows.

- 1) This product is produced under strict quality control and inspection procedures.
- 2) If this product breaks down during proper use as a result of product defect, will repair it within one year from date of purchase free of charge.
- 3) The following cases will be subject to charge, even during warranty period:
 - a. Breakdown during transport, or through careless treatment, by consumer.
 - b. Breakdown cause by unauthorized repair, or system modification.
 - c. Breakdown caused by natural disaster or power disorder.




Multi-View HUB Camera


HDMW-4123 / 4122HA

- 2M CMOS Sensor x 1ea(External Input x 2, 1)
- 1080P@30fps
- Analog HD (A-HD/TVI)
- 30 IR LED
- f=2.8-12mm Motorized (Auto Focus) Lens
- Defog Function (Visibility Enhancement)
- 3D Digital Noise Reduction


Multi-View HUB Dome Camera

Specifications

Image Device	1/2.9" SONY (IMX323) 		(1/2.8" IMX291)		
Total Pixels	2001(H) x 1121(V)		1945(H) x 1109(V)		
Effective Pixels	1985(V) x 1105(V)		1945(V) x 1097(V)		
Scanning System	Progressive				
Resolution	1080p@30fps				
Min. Illumination	0.0 Lux @ (IR ON)				
Video Output	AHD or TVI (Option)				
White Balance	ATW/AWB/AWC->SET/INDOOR/OUTDOOR/MANUAL				
Shutter Speed	MANUAL/AUTO/FLK				
LENS	2.8-12mm Motorized (Auto Focus) Lens				
On Screen Display	Built-In				
Display Mode	Full Screen, PIP, Split Screen mode available				
Video Adjustment	Brightness, Sharpness, Contrast				
Remote Control	Infrared Remote Controller				
Video Output Terminal	BNC Connector				
Power Input Terminal	Φ 5.5 Jack				
IR LED (Wavelength)	30 IR LEDs (850nm)				
Operting Temp./Storage Temp.	-10°C~-+50°C(14°F~122°F) / -20°C~-+60°C(-4°F~140°F)				
Humidity	Less than 80% RH				
Model No.		HDMW-4122AHD	HDMW-4123AHD	HVDMW-4122AHD	HVDMW-4123AHD
Power Consumption	Motorized Lens	DC 12v 8.7W	DC 12v 8.7W	DC 12v 8.7W	DC 12v 8.7W
	Fixed Lens	DC 12v 8.1W	DC 12v 8.1W	DC 12v 8.1W	DC 12v 8.1W
Dimension(mm)		Φ130 × 107			

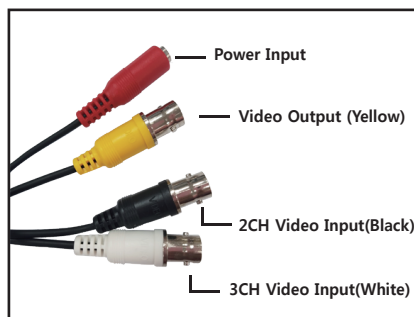


3CH

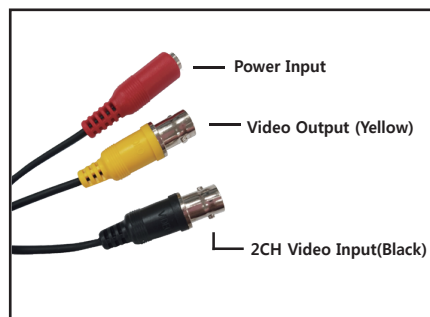

2CH

HDMW-4123 / 4122HA

Mounting

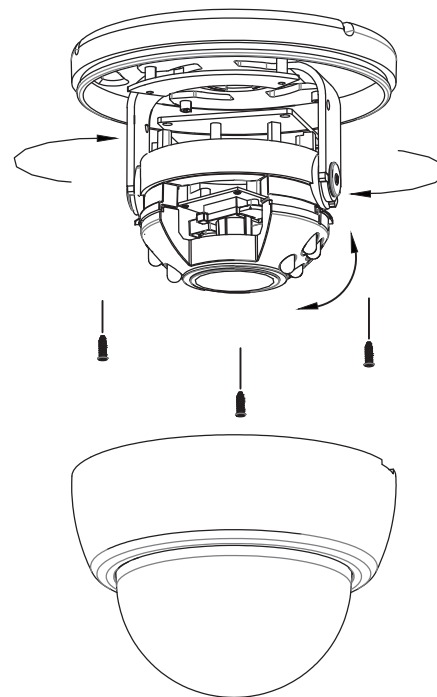

Dimension

